



# VERSATILITY TO DO MORE

- 1 BOX SCRAPER
- 2 ROTARY CUTTER
- 3 ROTARY TILLER
- 4 GRAPPLE
- 5 PALLET FORK
- 6 GROOMING MOWER
- 7 POST HOLE DIGGER
- AND MANY MORE!

The Kubota L02 Series comes with a wide range of performance matched implements to take on your toughest gardening, landscaping, snow removal and property maintenance jobs. Kubota implements are built to work in perfect harmony with the L02, so you'll have the power to haul, dig, mow, snowblow from spring to winter – and everything in between.



Learn more about Kubota's full implement range by visiting [KubotaUSA.com/L02](http://KubotaUSA.com/L02)



**KUBOTA TRACTOR CORPORATION**  
1000 Kubota Drive, Grapevine, TX 76051 | [www.KubotaUSA.com](http://www.KubotaUSA.com)



© 2022 Kubota Tractor Corporation | Part #: 329301

**For Earth, For Life**  
**Kubota**

# L02 SERIES

KUBOTA'S STANDARD L HAS EVOLVED.



MEET THE STANDARD  
**L02 SERIES**

---

## QUALITY, COMFORT, AND ADAPTABILITY TOGETHER IN ONE TOUGH PACKAGE.

From its beginnings as the L Series in 1967, to its evolution as the Standard L Series in 1997, Kubota's popular compact tractor line has continued to build on its reputation for affordability, durability and versatility. Enhanced and refined over generations of models, The Standard L Series has earned its rightful position as the core of the Kubota compact tractor lineup and the top selling compact tractor in the United States of America for more than 10 years\*. The L3302 and L3902 models build on the Standard L Series' legacy.

### COMFORT

The L02 Series combines affordability with comfort in this new standard model. Some of the L02 comfort features include a spacious operator station, improved comfortable suspension seat with optional arm rests, and standard rubber floor mats.

### MODERN STYLING

The sleek designed bonnet, LED headlights and work lights bring a premium appearance to the L02 Series.

### OPERATION / MAINTENANCE

By creating a compact tractor that is easy for everyone to use, Kubota has further improved the L02's ease of operation and maintenance so that even first time buyers can operate with peace of mind.

\*Based on EDA tractor sales data of under 40 horsepower models from 2009 to 2020.

---

## KUBOTA DIESEL ENGINE

The L Series is equipped with the Kubota-built engines that continue to be known for their reliability and power. Features include:

### POWERFUL PERFORMANCE

Kubota diesel engines are built for maximum performance. The L Series offers 2 horsepower options, 33.0 and 37.5 HP, to fit a wide variety of performance needs.

### TIER 4 FINAL EMISSION COMPLIANCE

The technology behind Kubota diesel engines comply with Tier 4 Final emission standards. Our L3302 and L3902 are equipped with a Common-Rail System (CRS) with electronic controlled fuel injection.

### SMOOTH, QUIET OPERATION

Kubota Diesel Engines are designed to provide smooth operation for operator comfort.

### FUEL EFFICIENCY

Kubota diesel engines are designed not only to maximize performance, but also keep you operating thanks to a large fuel tank and fuel efficient engine.

---

## HORSEPOWER RANGES

---

<b>L3302DT</b>	33.0 Engine HP / 28.0 PTO
----------------	---------------------------

---

<b>L3302HST</b>	33.0 Engine HP / 26.1 PTO
-----------------	---------------------------

---

<b>L3902DT</b>	37.5 Engine HP / 32.1 PTO
----------------	---------------------------

---

<b>L3902HST</b>	37.5 Engine HP / 30.3 PTO
-----------------	---------------------------

\* Based on EDA tractor sales data of under 40 horsepower models from 2009 to 2020.

\*\* Awards for compact tractors and overall tractor brand based on 2021 Progressive Farmer Reader Insights Tractor Study.

**#1 SELLING  
COMPACT TRACTOR  
IN THE USA\***

**BEST OWNERSHIP  
EXPERIENCE\*\***

**MOST DURABLE  
TRACTOR\*\***

*Progressive*  
**FARMER**  
READER INSIGHTS





---

## ALL-DAY COMFORT

### OPERATOR'S DECK LAYOUT

The L02 features a spacious operator's platform for optimal comfort. By removing the clutch on HST models, the operator's deck now features even more space than before.

### SUSPENSION SEAT


Keeping the operator's comfort in mind, all L02 models come with an enhanced suspension seat for long lasting comfort in a variety of terrains.

### OPTIONAL ARMRESTS

The optional armrest kit can be added to your L02 model for even more comfort to get the job done.

### STANDARD FLOOR MATS

Rubber floor mats are standard across all L02 models to increase operator comfort and provide foot traction.

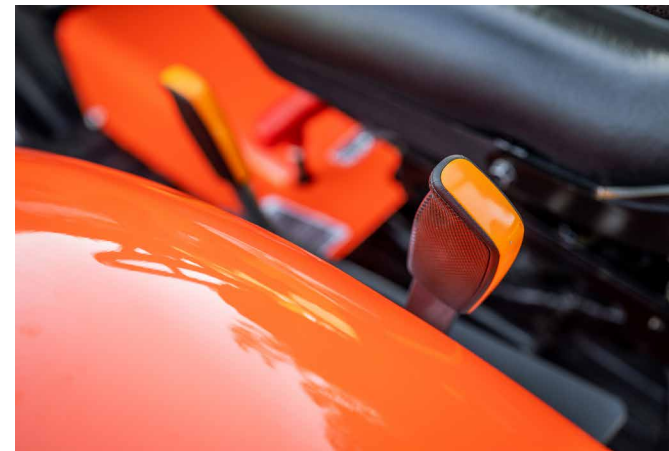

---

## MODERN STYLING

### BRUSH GUARD (OPTION)

The stylish newly adopted brush guard option provides good coverage by helping prevent the bonnet and grill from being damaged.

### LED HEADLIGHTS AND SIDE WORK LIGHTS

The L02 Series come with LED headlights and side work lights to provide the operator more visibility when working in early mornings or late into the night.

### MODERN LOOK, RELIABLE PERFORMANCE

The modern bonnet and grille offer a contemporary look while still keeping the tractor and engine protected. The Kubota logo is now added to the front guard to match the look of the Kubota family line up.

### ERGONOMIC LEVER GRIPS AND STEERING WHEEL

Ergonomic lever grips and steering wheel for easy access and smooth low vibration operation during any application.



## EASY OPERATION

### AVAILABLE IN HST OR GEAR DRIVE TRANSMISSION IN 4WD

Kubota transmissions deliver smooth operation in HST or Gear Drive configurations. The HST provides speed and forward/reverse control that can be operated simply by pressing down on the pedal. The Gear Drive provides the power and versatility with 8 forward and 8 reverse speeds to get the job done.

### CRUISE CONTROL – (OPTIONAL HST MODELS)

Cruise control lever allows operator to select and maintain the right travel speed to reduce operator fatigue.

### INDEPENDENT PTO SWITCH (CLUTCH-LESS) (HST MODEL)

Quick engagement of PTO through electric switch for simple engage and disengagement while operating. Conveniently located, “push and turn” starts and one push stops the PTO.

### CAST-IRON FRONT AND REAR AXLE

With your investment in mind, the L02 Series is equipped with a heavy duty cast-iron front axle which allows it to withstand years of wear and tear. Whether using the front loader, backhoe, or a 3-point implement, you can rely on the strength of the cast-iron front and rear axle to handle the job.



### HEAVY-DUTY 3-POINT HITCH

With a heavy-duty 3-Point Hitch, Kubota’s L02 Series takes on tough applications with a pulling performance you can count on. The L02 Series is equipped with a large capacity hydraulic cylinder and pump which allows for a powerful lifting capacity for a wider variety of implements.

### BRAKE PEDAL

Dual brake pedals for optional independent left side or right side hand braking. This allows for optimal turning radius.

### 2 LEVER QUICK COUPLER FOR LOADER ATTACHMENT

The quick coupler is simple to use. Attachments easily come on and off without the use of any tools.

### LAND PRIDE QUICK HITCH HELPS SAVE TIME & EFFORT

Kubota’s Standard L02 Series can be equipped with Land Pride’s quick hitch. This feature greatly improves ease of switching out rear implements and reducing the time it takes to do so. If you plan on having more than one rear 3-point implement, the Quick Hitch is the ultimate time saving, fatigue reducing accessory that you will come to love and appreciate.



## PERFORMANCE MATCHED KUBOTA-BUILT FRONT LOADER

### KUBOTA-BUILT LA526 FRONT LOADER

Designed for the L3302 and L3902 models. Maximum lift capacity of 1,144.4 pounds at the pin and a maximum lift height of 94.3 inches at the pin.

### TOP QUALITY LOADER VALVE

Simultaneous boom and bucket operation with a regenerative circuit. These features help increase speed and dump times to maximize productivity.

### EASY-TO-REMOVE

The Kubota LA526 front loader is designed to be easy to remove and reinstalled without tools. The mounting pins and hose couplers can be removed from the operator's seat. This convenient system saves valuable time by letting you attach and detach the loader from the tractor.

## UPDATED LOADER OPERABILITY

### CURVED BUCKET


Improved material handling performance by extending the bottom line of the bucket forward. This allows the operator to carry a variety of materials.

### NEW 3RD FUNCTION VALVE (OPTION)

The integrated 3rd function valve on the loader allows for precise use when working with grapples, combination buckets or post hole diggers. The 3rd function valve is easy to remove and assemble.

## LOADER SPECIFICATIONS

MODEL		LA526
2 Lever Quick Coupler		OPT
Matching Tractor		L3302/L3902
Maximum Lift Height (Pivot pin)	<i>in.(mm)</i>	94.3 (2394)
Clearance w/Attachment Dump	<i>in.(mm)</i>	74.6 (1896)
Reach @ Maximum Height	<i>in.(mm)</i>	24.5 (622)
Maximum Dump Angle	<i>deg.</i>	40
Reach w/Attachment on Ground	<i>in.(mm)</i>	66.1 (1679)
Maximum Rollback Angle	<i>deg.</i>	31
Digging Depth	<i>in.(mm)</i>	7.0 (178)
Overall Height in Carry Position	<i>in.(mm)</i>	51.3 (1302)
Lift Capacity (Pivot pin)	<i>lbs.(kg)</i>	1144.4 (519)
Lift Capacity (500 mm forward)	<i>lbs.(kg)</i>	864.4 (392)

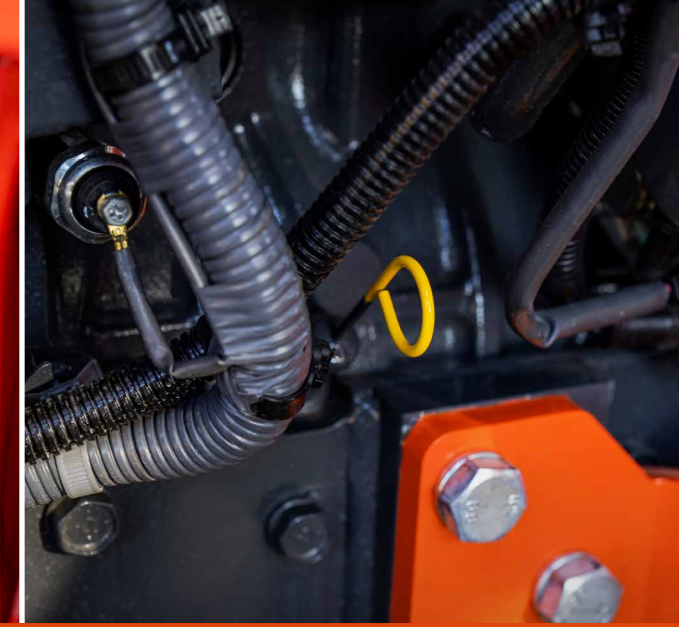

## PERFORMANCE MATCHED KUBOTA-BUILT BACKHOES

The BH77 Backhoes are performance matched with the L3302 and L3902 to deliver the power and operating capacity needed to get the job done. The full flat deck of the operator station delivers optimal legroom for operator comfort.

### DUAL SWING CYLINDERS WITH CUSHIONING VALVES

Standard dual swing cylinders allow full boom swinging capability from left to right. The cylinders are designed with standard cushioning valves, which give more comfort during backhoe operation by absorbing the impact shock from swinging the boom side to side or up and down.

### EASY-TO-REMOVE

The less time you spend between jobs, the more productive you are. The BH77 is equipped with a quick attach/detach mounting system. This makes attaching or detaching the backhoe easy so you can quickly move on to your next job.

MODEL		BH77
Matching Tractor		L3302/L3902
Transport Height	<i>in.(mm)</i>	80.3 (2040)
Stabilizer Spread Transport	<i>in.(mm)</i>	51.8 (1315)
Ground Clearance	<i>in.(mm)</i>	11.5 (292)
Digging Depth, 2ft. Flat Bottom	<i>in.(mm)</i>	89.8 (2280)
Loading Height	<i>in.(mm)</i>	65.7 (1669)
Reach from Swing Pivot	<i>in.(mm)</i>	124.3 (3156)
Swing Pivot to Rear Axle Center Line	<i>in.(mm)</i>	37.6 (954)
Bucket Rotation	<i>deg.</i>	180
Stabilizer Spread Operating	<i>in.(mm)</i>	69.0 (1753)

## HASSLE-FREE MAINTENANCE

### FUEL FILTER WITH WATER SEPARATING DEVICE

The L02 tractor has a new pre-filter with built in water separator for the fuel system. The new pre-filter/water separator offers the traditional float indicator in the water separator as well as an icon on the dash, and an audible alarm to alert the operator that the water separator needs to be drained.

Along with a durable chassis and easily accessible routinely checked items, the L02 Series' routine maintenance is simple. Here are a few of the most routinely checked items:

- Brake pedal adjustment
- Clutch pedal adjustment
- Engine oil
- Transmission fluid
- Fuel filter
- Grease fittings

### COLOR CODED OIL GAUGE AND OIL CAP

Increased visibility and access.

## SPECIFICATIONS

MODEL	L3302		L3902	
	Gear-Drive Transmission	HST	Gear-Drive Transmission	HST
	4WD	4WD	4WD	4WD
<b>ENGINE</b>				
<b>Type</b>	Direct injection, vertical, water-cooled 4-cycle diesel			
<b>Engine gross Power*</b> <i>HP (kW)</i>	33.0 (24.6)		37.5 (28.0)	
<b>Engine net Power**</b> <i>HP (kW)</i>	31.8 (23.7)		36.3 (27.1)	
<b>PTO Power</b> <i>HP (kW)</i>	28.0 (20.9)	26.1 (19.5)	32.1 (23.9)	30.3 (22.6)
<b>No. of Cylinders</b>	3			
<b>Bore &amp; Stroke</b> <i>in. (mm)</i>	3.4 x 4.0 (87 x 102.4)			
<b>Total Displacement</b> <i>cu. in. (cm³)</i>	111.4 (1826)			
<b>Rated Speed</b> <i>rpm</i>	2700			
<b>Battery</b>	12V, RC: 110 min, CCA: 580 A	12V, RC: 120 min, CCA: 600 A	12V, RC: 110 min, CCA: 580 A	12V, RC: 120 min, CCA: 600 A
<b>Alternator</b>	12V, 45A			
<b>Fuel Tank Capacity</b> <i>US gal. (ℓ)</i>	11.1 (42)			
<b>PTO</b>				
<b>Rear PTO Type</b>	Transmission driven with overrunning clutch	Live independent PTO with hydraulic clutch	Live – continuous running	Live independent PTO with hydraulic clutch
<b>PTO/Engine Speed</b>	540/2430	540/2470	540/2425	540/2470
<b>HYDRAULIC</b>				
<b>Lift control type</b>	Position control			
<b>Pump Capacity (main)</b> <i>gpm (ℓ/min)</i>	6.8 (25.7)			
<b>(PS)</b> <i>gpm (ℓ/min)</i>	4.1 (15.6)			
<b>3-Point Hitch</b>	SAE Category I			
<b>Lift Capacity at Lift Points</b> <i>lbs. (kg)</i>	1985 (900)			
<b>24 in. behind Lift Points</b> <i>lbs. (kg)</i>	1433 (650)			
<b>System Pressure</b> <i>psi</i>	2347			



\* SAE J1995 \*\* SAE J1349

Kubota Tractor Corporation reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for the United States and US territories only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.

MODEL	L3302		L3902	
	Gear-Drive Transmission	HST	Gear-Drive Transmission	HST
	4WD	4WD	4WD	4WD
<b>TRAVELING SYSTEM</b>				
<b>Transmission</b>	Gear shift with synchronized shuttle, 8 forward and 8 reverse	Hydrostatic transmission, 3 range speed	Gear shift with synchronized shuttle, 8 forward and 8 reverse	Hydrostatic transmission, 3 range speed
<b>Steering</b>	Integral type power steering			
<b>Brake</b>	Mechanical, wet disc type			
<b>Clutch</b>	Dry type single stage	–	Dry type dual stage	–
<b>TIRE SIZE</b>				
<b>AG Standard Front/Rear</b>	7.2 – 16 / 11.2 – 24			
<b>TURF Option Front/Rear</b>	25 x 8.50 – 14 / 13.6 – 16			
<b>Indust. Option Front/Rear</b>	27 x 8.50 – 15 / 15 – 19.5 R4			
<b>AG/Indust. Hybrid Option Front/Rear</b>	27 x 8.50 – 15 R14 / 15 – 19.5 R14 Front 29 x 9.50 – 15 R14 / Rear 43 x 16.00 – 20 R14			
<b>Traveling Speed with Standard AG Tires</b> <i>mph (km/h)</i>	Forward 1.1 (1.7) – 13.2 (21.2) Reverse 1.1 (1.7) – 13.2 (21.2)	Forward 0.0 (0.0) – 14.1 (22.7) Reverse 0.0 (0.0) – 12.7 (20.5)	Forward 1.1 (1.7) – 13.2 (21.2) Reverse 1.1 (1.7) – 13.2 (21.2)	Forward 0.0 (0.0) – 14.1 (22.7) Reverse 0.0 (0.0) – 12.7 (20.5)
<b>DIMENSIONS</b>				
<b>Overall Length (w/o 3P)</b> <i>in. (mm)</i>	108.7 (2760)			
<b>Overall Width (min. tread)</b> <i>in. (mm)</i>	55.1 (1400)			
<b>Overall Height (w/Foldable ROPS)</b> <i>in. (mm)</i>	91.7 (2330)			
<b>Wheelbase</b> <i>in. (mm)</i>	63.4 (1610)			
<b>Min. Ground Clearance</b> <i>in. (mm)</i>	13.4 (340)			
<b>Tread Front Tire</b> <i>in. (mm)</i>	43.1 (1095)			
<b>Tread Rear Tire</b> <i>in. (mm)</i>	43.9 (1115) / 47.1 (1195) / 50.8 (1290)			
<b>Min. Turning Radius (w/brake, 4WD disengaged)</b> <i>feet (m)</i>	8.2 (2.5)			
<b>Weight (with ROPS)</b> <i>lbs. (kg)</i>	2866 (1300)	2921 (1325)	2899 (1315)	2921 (1325)